

Maxview

Vehicle Barrier


BR-D105 Series

Parameters:


Maximum straight boom length	1.5s type	3m
	3s type	4.5m
	6s type	6m
Opening and closing times	1.5s/3s/6s	
Voltage	220V/110V +-10%	
Frequency	60HZ/50HZ	
Motor power consumption	100W	
Working temperature	-40°to 85°	
Housing dimension	340(Width)*232(Depth)*1035(Height)mm	
Weight not including barrier boom	45kgs	
Drive	Torque motor	
Maximum Remote Control Distance	30m	

Boom Type:


Straight Boom



Folding Boom

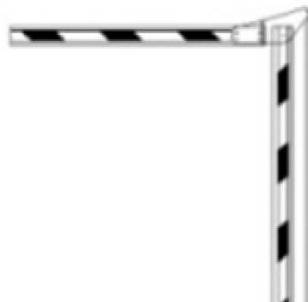


Fence Boom

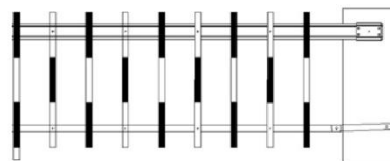

Type	Opening and closing times	Maximum boom length
Straight Boom	1.5s	3m
	3s	4.5m
	6s	6m
Folding Boom	3s	4.5m
	6s	6m
Fence Boom	6s	5m

Retractable Straight Boom, easy for transportation (Optional):

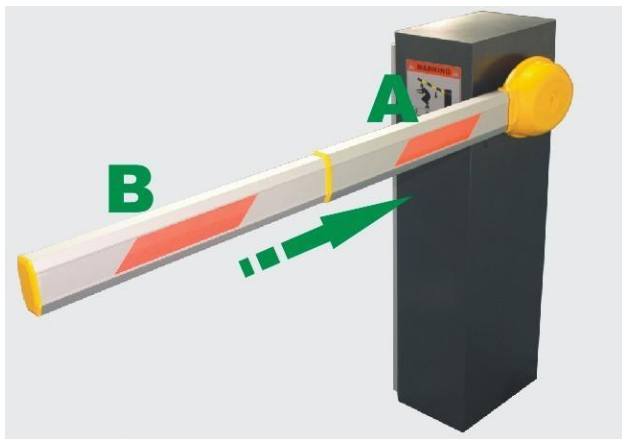


A = Master Boom, B=Slave Boom

$B \leq A$

Part B can be contracting inside in part A. This boom design is served for easy-transportation. From now on, 6m boom transportation can be easier and more convenient. 6m straight boom can be made as 4m+2m or 3m+3m.

Direction:



Right-hand version



Left-hand version

Machine core:

